

Technical Data Sheet


Preface

ADMER™ QB510E is a maleic anhydride grafted, homo-PP based standard adhesive resin for bottles, sheets and films composed of Polypropylene and EVOH or PA.

Properties

Item	Value	Unit	ASTM Testing Method
MFR (230°C, 2.16kg)	2.6	g/10 min	D1238
Density	0.90	g/cm ³	D1505
Tensile Strength at Yield	25	MPa	D638
Tensile Strength at Break	21	MPa	D638
Elongation at Break	230	%	D638
Shore Hardness	66	D scale	D2240
Vicat Softening Point	142	°C	D1525
Melt Temperature	160	°C	D3418

Test specimens prepared by compression moulding according to ISO 19069 and ASTM D638, D1525 and D2240; Vicat measured at load 1 (10N), rate A (50°C/h)

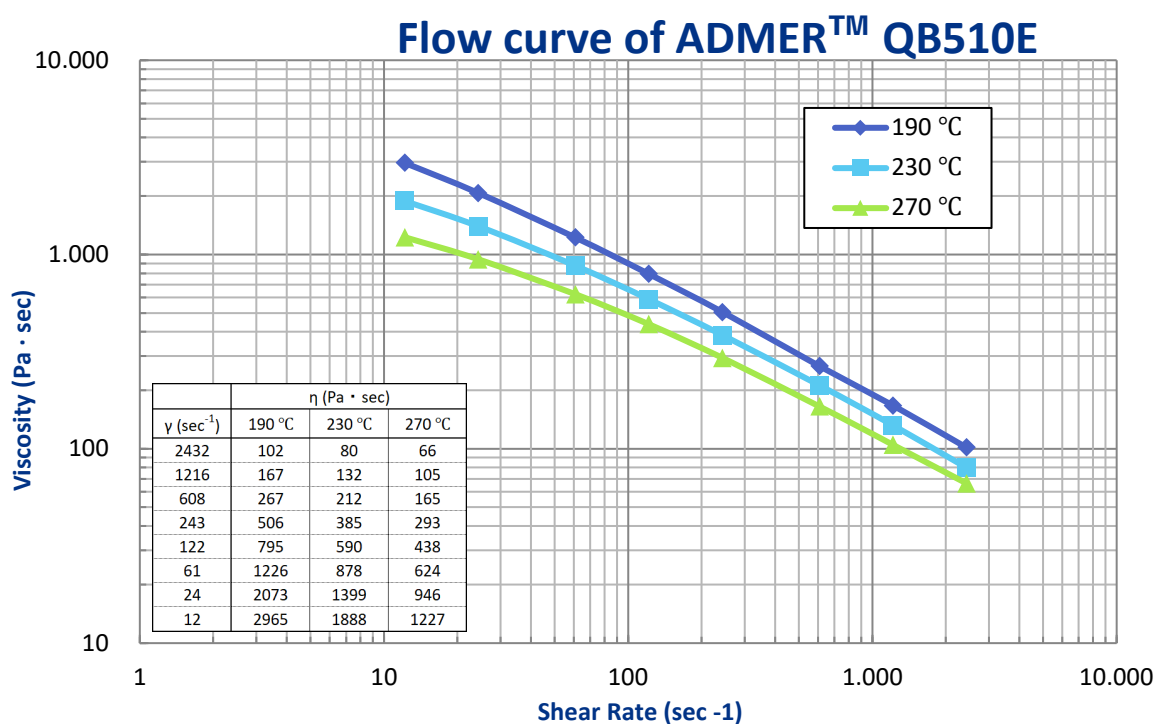

Processing

The recommended processing temperatures for ADMER™ can be found in our temperature proposal.

Maximum temperature: 300 °C; Temperatures above the upper limit or long residence times of molten resin may lead to decomposition of the polymer. Decomposition products may be carbon monoxide, carbon dioxide, hydrocarbons and water.

Whilst the extrusion process is either interrupted or terminated:

Less than 2 hours: Screw rotation can be stopped maintaining temperature.

More than 2 hours: Purge out and shut down in accordance with common procedure.

Handling

ADMER™ resins are supplied in the form of small, free flowing pellets and can be easily handled with commercially available equipment. We recommend to store ADMER™ at a dry and clean place at room temperature without sunlight exposure. Precaution should be taken in opening the package to avoid contamination by foreign materials.

Since ADMER™ is a non-hygroscopic material, it absorbs less moisture than non-polyolefin polymers. Therefore, ADMER™ does not require drying prior to processing.

ADMER™ can be re-used, recycled or incinerated with energy recovery. We do not recommend disposing of ADMER™ on a landfill. However, any disposal must comply with local regulations and recommendations.

Food Status

This information is only suitable for grade selection. For detailed information always refer to our Food Contact Status Declaration which is available on request. It is the full responsibility of the manufacturer of food contact materials or articles to ensure the suitability of above mentioned ADMER™ grade in its intended application.

EU: Monomers and additives are listed as authorized monomers/additives in Annex I of Regulation (EU) No. 10/2011 as amended to the current date. Please refer to our Food Contact Status Declaration regarding substances restricted by SMLs and Dual Use Additives.

USA: This ADMER™ grade conforms to FDA 21 CFR §175.105 (Adhesives). Please contact us for further details.

Disclaimer:

The information and numerical results are for information only and are given in good faith.

In view of numerous factors of which we are unaware and which are beyond our control regarding the use of our products, we cannot guarantee that this information covers all possible aspects of the subject. Moreover, we cannot accept any responsibility with regard to patents for applications and processes described.